

FEATURES

- True 16-bit voltage output DAC, ± 0.5 LSB INL**
- 8 nV/ $\sqrt{\text{Hz}}$ output noise spectral density**
- 0.00625 LSB long-term linearity error stability**
- ± 0.018 ppm/ $^{\circ}\text{C}$ gain error temperature coefficient**
- 2.5 μs output voltage settling time**
- 3.5 nV-sec midscale glitch impulse**
- Integrated precision reference buffers**
- Operating temperature range: -40°C to $+125^{\circ}\text{C}$**
- 4 mm \times 5 mm LFCSP package**
- Wide power supply range of up to ± 16.5 V**
- 35 MHz Schmitt triggered digital interface**
- 1.8 V-compatible digital interface**

APPLICATIONS

- Medical instrumentation**
- Test and measurement**
- Industrial control**
- Scientific and aerospace instrumentation**
- Data acquisition systems**
- Digital gain and offset adjustment**
- Power supply control**

GENERAL DESCRIPTION

The AD5760¹ is a true 16-bit, unbuffered voltage output digital-to-analog converter (DAC) that operates from a bipolar supply of up to 33 V. The AD5760 accepts a positive reference input range of 5 V to $V_{DD} - 2.5$ V and a negative reference input range of $V_{SS} + 2.5$ V to 0 V. The AD5760 offers a relative accuracy specification of ± 0.5 LSB maximum range, and operation is guaranteed monotonic with a ± 0.5 LSB differential nonlinearity (DNL) maximum range specification.

The device uses a versatile 3-wire serial interface that operates at clock rates of up to 35 MHz and is compatible with standard serial peripheral interface (SPI), QSPI™, MICROWIRE™, and DSP interface standards. The device incorporates a power-on reset circuit that ensures that the DAC output powers up to 0 V in a known output impedance state and remains in this state until a valid write to the device takes place. The device provides an output clamp feature that places the output in a defined load state.

¹ Protected by U.S. Patent No. 7,884,747 and 8,089,380.

Rev. F

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

FUNCTIONAL BLOCK DIAGRAM

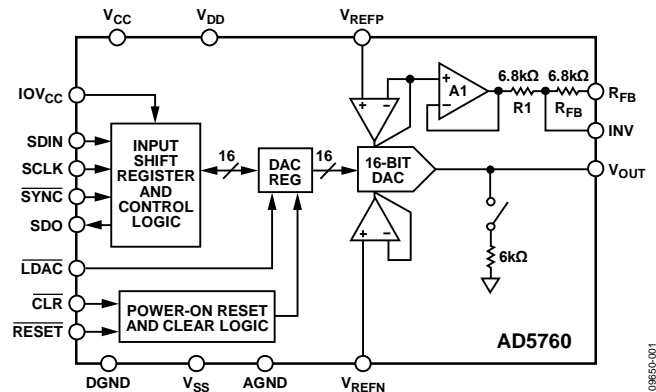


Figure 1.

Table 1. Related Devices

| Part No. | Description |
|---------------------------------|--------------------------------|
| AD5790 | 20-bit, 2 LSB accurate DAC |
| AD5791 | 20-bit, 1 LSB accurate DAC |
| AD5780 | 18-bit, 1 LSB accurate DAC |
| AD5781 | 18-bit, 0.5 LSB INL |
| AD5541A/AD5542A | 16-bit, 1 LSB accurate 5 V DAC |

PRODUCT HIGHLIGHTS

1. True 16-bit accuracy.
2. Wide power supply range of up to ± 16.5 V.
3. -40°C to $+125^{\circ}\text{C}$ operating temperature range.
4. Low 8 nV/ $\sqrt{\text{Hz}}$ noise.
5. Low ± 0.018 ppm/ $^{\circ}\text{C}$ gain error temperature coefficient.

COMPANION PRODUCTS

Output Amplifier Buffer: [AD8675](#), [ADA4898-1](#), [ADA4004-1](#)

External Reference: [ADR445](#)

DC-to-DC Design Tool: [ADIsimPower™](#)

Additional companion products on the [AD5780 product page](#).

TABLE OF CONTENTS

| | | | |
|--|----|-------------------------------------|----|
| Features | 1 | DAC Architecture..... | 18 |
| Applications..... | 1 | Serial Interface..... | 18 |
| Functional Block Diagram | 1 | Hardware Control Pins..... | 19 |
| General Description | 1 | On-Chip Registers..... | 19 |
| Product Highlights | 1 | AD5760 Features | 23 |
| Companion Products | 1 | Power-On to 0 V..... | 23 |
| Revision History | 2 | Power-Up Sequence | 23 |
| Specifications..... | 3 | Configuring the AD5760 | 23 |
| Timing Characteristics | 5 | DAC Output State | 23 |
| Absolute Maximum Ratings..... | 7 | Output Amplifier Configuration..... | 23 |
| ESD Caution..... | 7 | Applications Information | 25 |
| Pin Configuration and Function Descriptions..... | 8 | Typical Operating Circuit | 25 |
| Typical Performance Characteristics | 9 | Evaluation Board | 26 |
| Terminology | 17 | Outline Dimensions..... | 27 |
| Theory of Operation | 18 | Ordering Guide | 27 |

REVISION HISTORY

4/2018—Rev. E to Rev. F

| | |
|--|----|
| Added Power-Up Sequence Section and Figure 50; Renumbered Sequentially | 23 |
| Updated Outline Dimensions | 27 |
| Changes to Ordering Guide | 27 |

10/2016—Rev. D to Rev. E

| | |
|--|----|
| Changes to Figure 4 and Table 5..... | 8 |
| Changes to Figure 42, Figure 43, and Figure 44 | 15 |

7/2013—Rev. C to Rev. D

| | |
|---|----|
| Changes to t_1 Test Conditions/Comments and Endnote 2 | 5 |
| Deleted Figure 4..... | 7 |
| Changes to Pin 11 Description | 8 |
| Deleted Daisy-Chain Operation Section..... | 20 |

9/2012—Rev. B to Rev. C

| | |
|---|----|
| Changes to Patent Footnote | 1 |
| Changes to Figure 46..... | 17 |
| Changes to Terminology Section | 19 |
| Changes to Figure 53..... | 25 |
| Changes to Figure 55..... | 27 |
| Updated Outline Dimensions and changes to Ordering Guide..... | 29 |

2/2012—Rev. A to Rev. B

| | |
|--|---|
| Deleted Linearity Compensation Section | 3 |
|--|---|

12/2011—Rev. 0 to Rev. A

| | |
|--|----|
| Changes to Table 2..... | 3 |
| Changes to Figure 48..... | 18 |
| Changes to DAC Register Section..... | 22 |
| Changes to Table 10 and Table 11 | 23 |

11/2011—Revision 0: Initial Version

SPECIFICATIONS

$V_{DD} = +12.5\text{ V to }+16.5\text{ V}$, $V_{SS} = -16.5\text{ V to }-12.5\text{ V}$, $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$, $V_{CC} = 2.7\text{ V to }5.5\text{ V}$, $IOV_{CC} = 1.71\text{ V to }5.5\text{ V}$, s
 $R_L = \text{unloaded}$, $C_L = \text{unloaded}$, T_{MIN} to T_{MAX} , unless otherwise noted.

Table 2.

| Parameter | A, B Versions ¹ | | | Unit | Test Conditions/Comments |
|--|----------------------------|--------------|------------|------------------------|---|
| | Min | Typ | Max | | |
| STATIC PERFORMANCE ² | | | | | |
| Resolution | 16 | | | Bits | |
| Integral Nonlinearity Error (Relative Accuracy) | -0.5 | | +0.5 | LSB | B grade, $V_{REFX} = \pm 10\text{ V}$, $+10\text{ V}$ and $+5\text{ V}$ |
| Differential Nonlinearity Error | -2 | | +2 | LSB | A grade, $V_{REFX} = \pm 10\text{ V}$, $+10\text{ V}$ and $+5\text{ V}$ |
| | -0.5 | | +0.5 | LSB | B grade, $V_{REFX} = \pm 10\text{ V}$, $+10\text{ V}$ and $+5\text{ V}$ |
| Long-Term Linearity Error Stability ³ | -1 | | +1 | LSB | A grade, $V_{REFX} = \pm 10\text{ V}$, $+10\text{ V}$ and $+5\text{ V}$ |
| | | 0.00625 | | LSB | After 750 hours at $T_A = 135^\circ\text{C}$ |
| Full-Scale Error | -0.75 | ± 0.2 | +0.75 | LSB | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$ |
| | -1.4 | ± 0.17 | +1.4 | LSB | $V_{REFP} = 10\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| | -2.5 | ± 0.1 | +2.5 | LSB | $V_{REFP} = 5\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| Full-Scale Error Temperature Coefficient | | ± 0.026 | | ppm/ $^\circ\text{C}$ | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$ |
| Zero-Scale Error | -1.2 | ± 0.0812 | +1.2 | LSB | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$ |
| | -2.5 | ± 0.044 | +2.5 | LSB | $V_{REFP} = 10\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| | -5.2 | ± 0.056 | +5.2 | LSB | $V_{REFP} = 5\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| Zero-Scale Error Temperature Coefficient | | ± 0.025 | | ppm/ $^\circ\text{C}$ | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$ |
| Gain Error | -19 | ± 2.3 | +19 | ppm FSR | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$ |
| | -35 | ± 1.9 | +35 | ppm FSR | $V_{REFP} = 10\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| | -68 | ± 0.9 | +68 | ppm FSR | $V_{REFP} = 5\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| Gain Error Temperature Coefficient | | ± 0.018 | | ppm/ $^\circ\text{C}$ | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$ |
| R_1 , R_{FB} Matching | | 0.015 | | % | |
| OUTPUT CHARACTERISTICS | | | | | |
| Output Voltage Range | V_{REFN} | | V_{REFP} | V | |
| Output Voltage Settling Time | | 2.5 | | μs | 10 V step to 0.02%, using the ADA4898-1 buffer in unity-gain mode |
| Output Noise Spectral Density | | 3.5 | | μs | 125 code step to $\pm 1\text{ LSB}^4$ |
| | | 8 | | nV/ $\sqrt{\text{Hz}}$ | At 1 kHz, DAC code = midscale |
| Output Voltage Noise | | 8 | | nV/ $\sqrt{\text{Hz}}$ | At 10 kHz, DAC code = midscale |
| | | 1.1 | | $\mu\text{V p-p}$ | DAC code = midscale, 0.1 Hz to 10 Hz bandwidth |
| Midscale Glitch Impulse ⁴ | | 14 | | nV-sec | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$ |
| | | 3.5 | | nV-sec | $V_{REFP} = 10\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| | | 4 | | nV-sec | $V_{REFP} = 5\text{ V}$, $V_{REFN} = 0\text{ V}$ |
| MSB Segment Glitch Impulse ⁴ | | 14 | | nV-sec | $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$, see Figure 42 |
| | | 3.5 | | nV-sec | $V_{REFP} = 10\text{ V}$, $V_{REFN} = 0\text{ V}$, see Figure 43 |
| | | 4 | | nV-sec | $V_{REFP} = 5\text{ V}$, $V_{REFN} = 0\text{ V}$, see Figure 44 |
| Output Enabled Glitch Impulse | | 57 | | nV-sec | On removal of output ground clamp |
| Digital Feedthrough | | 0.27 | | nV-sec | |
| DC Output Impedance (Normal Mode) | | 3.4 | | k Ω | |
| DC Output Impedance (Output Clamped to Ground) | | 6 | | k Ω | |

| Parameter | A, B Versions ¹ | | | Unit | Test Conditions/Comments |
|-----------------------------------|------------------------------|-----------|------------------------------|------------------------|--|
| | Min | Typ | Max | | |
| REFERENCE INPUTS | | | | | |
| V_{REFP} Input Range | 5 | | $V_{DD} - 2.5$ | V | $T_A = 0^\circ\text{C}$ to 105°C V_{REFP}, V_{REFN} |
| V_{REFN} Input Range | $V_{SS} + 2.5$ | | 0 | V | |
| Input Bias Current | -20 | -0.63 | +20 | nA | |
| Input Capacitance | -4 | -0.63 | +4 | pF | |
| LOGIC INPUTS | | | | | |
| Input Current ⁵ | -1 | | +1 | μA | $\text{IOV}_{CC} = 1.71\text{ V}$ to 5.5 V $\text{IOV}_{CC} = 1.71\text{ V}$ to 5.5 V |
| Input Low Voltage, V_{IL} | | | $0.3 \times \text{IOV}_{CC}$ | V | |
| Input High Voltage, V_{IH} | $0.7 \times \text{IOV}_{CC}$ | | | V | |
| Pin Capacitance | | 5 | | pF | |
| LOGIC OUTPUT (SDO) | | | | | |
| Output Low Voltage, V_{OL} | | | 0.4 | V | $\text{IOV}_{CC} = 1.71\text{ V}$ to 5.5 V , sinking 1 mA $\text{IOV}_{CC} = 1.71\text{ V}$ to 5.5 V , sourcing 1 mA |
| Output High Voltage, V_{OH} | $\text{IOV}_{CC} - 0.5$ | | | V | |
| High Impedance Leakage Current | | | ± 1 | μA | |
| High Impedance Output Capacitance | | 3 | | pF | |
| POWER REQUIREMENTS | | | | | |
| V_{DD} | 7.5 | | $V_{SS} + 33$ | V | All digital inputs at DGND or IOV_{CC} $\text{IOV}_{CC} \leq V_{CC}$ |
| V_{SS} | $V_{DD} - 33$ | | -2.5 | V | |
| V_{CC} | 2.7 | | 5.5 | V | |
| IOV_{CC} | 1.71 | | 5.5 | V | |
| I_{DD} | | 10.3 | 14 | mA | SDO disabled $\Delta V_{DD} \pm 10\%$, $V_{SS} = -15\text{ V}$ $\Delta V_{SS} \pm 10\%$, $V_{DD} = 15\text{ V}$ $\Delta V_{DD} \pm 200\text{ mV}$, 50 Hz/60 Hz, $V_{SS} = -15\text{ V}$ $\Delta V_{SS} \pm 200\text{ mV}$, 50 Hz/60 Hz, $V_{DD} = 15\text{ V}$ |
| I_{SS} | | -10 | -14 | mA | |
| I_{CC} | | 600 | 900 | μA | |
| IOI_{CC} | | 52 | 140 | μA | |
| DC Power Supply Rejection Ratio | | ± 7.5 | | $\mu\text{V}/\text{V}$ | |
| | | ± 1.5 | | $\mu\text{V}/\text{V}$ | |
| AC Power Supply Rejection Ratio | | 90 | | dB | |
| | | 90 | | dB | |

¹ Temperature range: -40°C to $+125^\circ\text{C}$, typical conditions: $T_A = 25^\circ\text{C}$, $V_{DD} = +15\text{ V}$, $V_{SS} = -15\text{ V}$, $V_{REFP} = +10\text{ V}$, $V_{REFN} = -10\text{ V}$.

² Performance characterized with the AD8675ARZ output buffer.

³ Linearity error refers to both INL error and DNL error; either parameter can be expected to drift by the amount specified after the length of time specified.

⁴ The AD5760 is configured in unity-gain mode with a low-pass RC filter on the output. $R = 300\ \Omega$, $C = 143\ \text{pF}$ (total capacitance seen by the output buffer, lead capacitance, and so forth).

⁵ Current flowing in an individual logic pin.

TIMING CHARACTERISTICS

$V_{CC} = 2.7\text{ V to }5.5\text{ V}$; all specifications T_{MIN} to T_{MAX} , unless otherwise noted.

Table 3.

| Parameter | Limit ¹ | | Unit | Test Conditions/Comments |
|-----------|--|---|--------|---|
| | $IOV_{CC} = 1.71\text{ V to }3.3\text{ V}$ | $IOV_{CC} = 3.3\text{ V to }5.5\text{ V}$ | | |
| t_1^2 | 40 | 28 | ns min | SCLK cycle time |
| | 92 | 60 | ns min | SCLK cycle time (readback mode) |
| t_2 | 15 | 10 | ns min | SCLK high time |
| t_3 | 9 | 5 | ns min | SCLK low time |
| t_4 | 5 | 5 | ns min | \overline{SYNC} to SCLK falling edge setup time |
| t_5 | 2 | 2 | ns min | SCLK falling edge to \overline{SYNC} rising edge hold time |
| t_6 | 48 | 40 | ns min | Minimum \overline{SYNC} high time |
| t_7 | 8 | 6 | ns min | \overline{SYNC} rising edge to next SCLK falling edge ignore |
| t_8 | 9 | 7 | ns min | Data setup time |
| t_9 | 12 | 7 | ns min | Data hold time |
| t_{10} | 13 | 10 | ns min | \overline{LDAC} falling edge to \overline{SYNC} falling edge |
| t_{11} | 20 | 16 | ns min | \overline{SYNC} rising edge to \overline{LDAC} falling edge |
| t_{12} | 14 | 11 | ns min | \overline{LDAC} pulse width low |
| t_{13} | 130 | 130 | ns typ | \overline{LDAC} falling edge to output response time |
| t_{14} | 130 | 130 | ns typ | \overline{SYNC} rising edge to output response time (\overline{LDAC} tied low) |
| t_{15} | 50 | 50 | ns min | \overline{CLR} pulse width low |
| t_{16} | 140 | 140 | ns typ | \overline{CLR} pulse activation time |
| t_{17} | 0 | 0 | ns min | \overline{SYNC} falling edge to first SCLK rising edge |
| t_{18} | 65 | 60 | ns max | \overline{SYNC} rising edge to SDO tristate ($C_L = 50\text{ pF}$) |
| t_{19} | 62 | 45 | ns max | SCLK rising edge to SDO valid ($C_L = 50\text{ pF}$) |
| t_{20} | 0 | 0 | ns min | \overline{SYNC} rising edge to SCLK rising edge ignore |
| t_{21} | 35 | 35 | ns typ | \overline{RESET} pulse width low |
| t_{22} | 150 | 150 | ns typ | \overline{RESET} pulse activation time |

¹ All input signals are specified with $t_r = t_f = 1\text{ ns/V}$ (10% to 90% of IOV_{CC}) and timed from a voltage level of $(V_{IL} + V_{IH})/2$.

² Maximum SCLK frequency is 35 MHz for write mode and 16 MHz for readback mode.

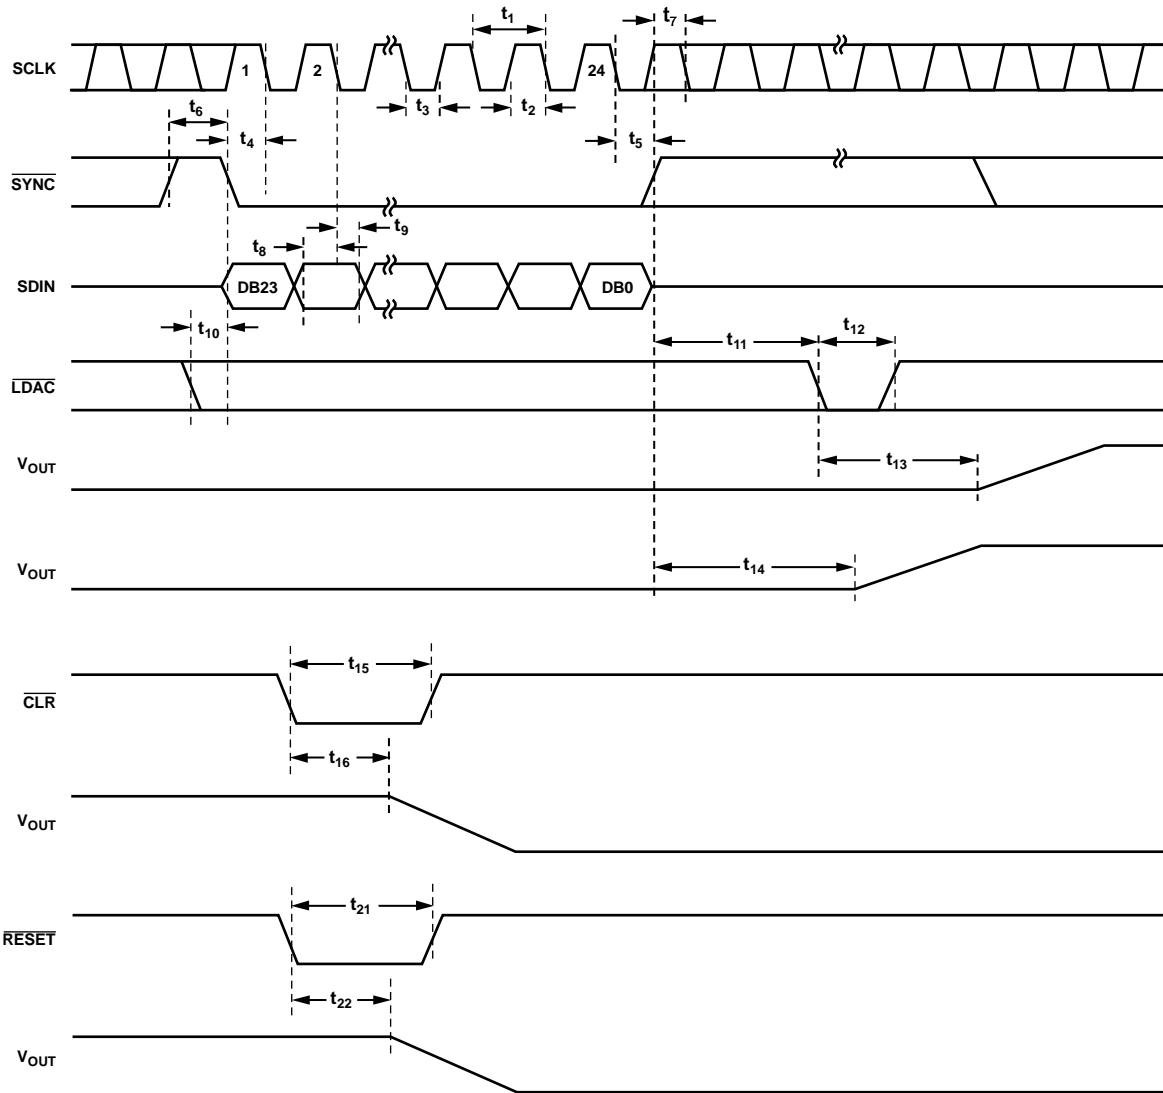


Figure 2. Write Mode Timing Diagram

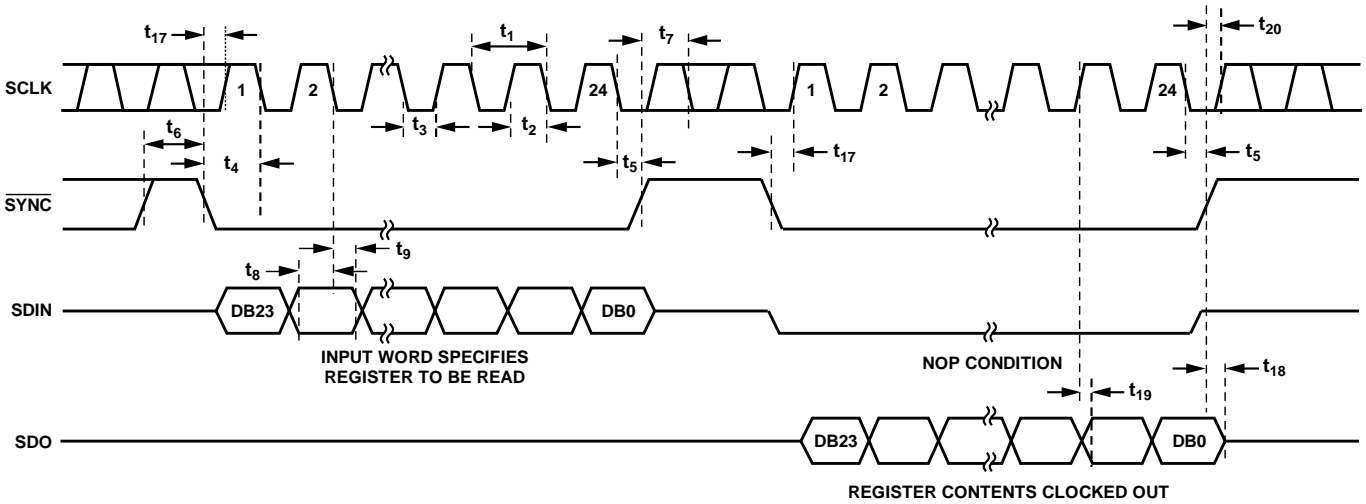


Figure 3. Readback Mode Timing Diagram

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise noted. Transient currents of up to 100 mA do not cause SCR latch-up.

Table 4.

| Parameter | Rating |
|--|---|
| V_{DD} to AGND | -0.3 V to +34 V |
| V_{SS} to AGND | -34 V to +0.3 V |
| V_{DD} to V_{SS} | -0.3 V to +34 V |
| V_{CC} to DGND | -0.3 V to +7 V |
| IOV_{CC} to DGND | -0.3 V to $V_{CC} + 3\text{ V}$ or +7 V (whichever is less) |
| Digital Inputs to DGND | -0.3 V to $IOV_{CC} + 0.3\text{ V}$ or +7 V (whichever is less) |
| V_{OUT} to AGND | -0.3 V to $V_{DD} + 0.3\text{ V}$ |
| V_{REFP} to AGND | -0.3 V to $V_{DD} + 0.3\text{ V}$ |
| V_{REFN} to AGND | $V_{SS} - 0.3\text{ V}$ to +0.3 V |
| DGND to AGND | -0.3 V to +0.3 V |
| Operating Temperature Range, T_A Industrial | -40°C to $+125^\circ\text{C}$ |
| Storage Temperature Range | -65°C to $+150^\circ\text{C}$ |
| Maximum Junction Temperature, T_J max | 150°C |
| Power Dissipation | $(T_J \text{ max} - T_A)/\theta_{JA}$ |
| LFCSP Package θ_{JA} Thermal Impedance | 31.0°C/W |
| Lead Temperature Soldering | JEDEC industry standard J-STD-020 |
| ESD (Human Body Model) | 1.6 kV |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.


This device is a high performance integrated circuit with an ESD rating of 1.6 kV, and it is ESD sensitive. Proper precautions must be taken for handling and assembly.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS



NOTES

1. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.
2. NEGATIVE ANALOG SUPPLY CONNECTION (V_{SS}). A VOLTAGE IN THE RANGE OF $-16.5V$ TO $-2.5V$ CAN BE CONNECTED TO THIS PIN. V_{SS} MUST BE DECOUPLED TO AGND.
3. EXPOSED PAD. THE EXPOSED PAD CAN BE LEFT ELECTRICALLY UNCONNECTED PROVIDED THAT A SUPPLY CONNECTION IS MADE AT THE V_{SS} PINS. IT IS RECOMMENDED THAT THE EXPOSED PAD BE THERMALLY CONNECTED TO A COPPER PLANE FOR ENHANCED THERMAL PERFORMANCE.

09650-005

Figure 4. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|----------------|--------------------|--|
| 1 | V_{OUT} | Analog Output Voltage. |
| 2 | V_{REFP} | Positive Reference Voltage Input. A voltage in the range of 5 V to $V_{DD} - 2.5 V$ can be connected to this pin. |
| 3, 5 | V_{DD} | Positive Analog Supply Connection. A voltage in the range of 7.5 V to 16.5 V can be connected to this pin. V_{DD} must be decoupled to AGND. |
| 4 | \overline{RESET} | Active Low Reset. Asserting this pin returns the AD5760 to its power-on status. |
| 6 | \overline{CLR} | Active Low Input. Asserting this pin sets the DAC register to a user defined value (see Table 12) and updates the DAC output. The output value depends on the DAC register coding that is being used, either binary or twos complement. |
| 7 | \overline{LDAC} | Active Low Load DAC Logic Input. This pin is used to update the DAC register and, consequently, the analog output. When tied permanently low, the output is updated on the rising edge of \overline{SYNC} . If \overline{LDAC} is held high during the write cycle, the input register is updated, but the output update is held off until the falling edge of \overline{LDAC} . Do not leave the \overline{LDAC} pin unconnected. |
| 8 | V_{CC} | Digital Supply. Voltage range is from 2.7 V to 5.5 V. V_{CC} should be decoupled to DGND. |
| 9 | IOV_{CC} | Digital Interface Supply. Digital threshold levels are referenced to the voltage applied to this pin. Voltage range is from 1.71 V to 5.5 V. |
| 10, 21, 22, 23 | DNC | Do Not Connect. Do not connect to these pins. |
| 11 | SDO | Serial Data Output. Data is clocked out on the rising edge of the serial clock input. |
| 12 | SDIN | Serial Data Input. This device has a 24-bit input shift register. Data is clocked into the register on the falling edge of the serial clock input. |
| 13 | SCLK | Serial Clock Input. Data is clocked into the input shift register on the falling edge of the serial clock input. Data can be transferred at rates of up to 35 MHz. |
| 14 | \overline{SYNC} | Level Triggered Control Input (Active Low). This is the frame synchronization signal for the input data. When \overline{SYNC} goes low, it enables the input shift register, and data is then transferred in on the falling edges of the following clocks. The DAC is updated on the rising edge of \overline{SYNC} . |
| 15 | DGND | Ground Reference Pin for Digital Circuitry. |
| 16 | V_{REFN} | Negative Reference Voltage Input. |
| 17, 18 | V_{SS} | Negative Analog Supply Connection. A voltage in the range of $-16.5 V$ to $-2.5 V$ can be connected to this pin. V_{SS} must be decoupled to AGND. |
| 19 | AGND | Ground Reference Pin for Analog Circuitry. |
| 20 | R_{FB} | Feedback Connection for External Amplifier. See the AD5760 Features section for further details. |
| 24 | INV | Inverting Input Connection for External Amplifier. See the AD5760 Features section for further details. |
| | EPAD (V_{SS}) | Exposed Pad. The exposed pad can be left electrically unconnected provided that a supply connection is made at the V_{SS} pins. It is recommended that the exposed pad be thermally connected to a copper plane for enhanced thermal performance. |

TYPICAL PERFORMANCE CHARACTERISTICS

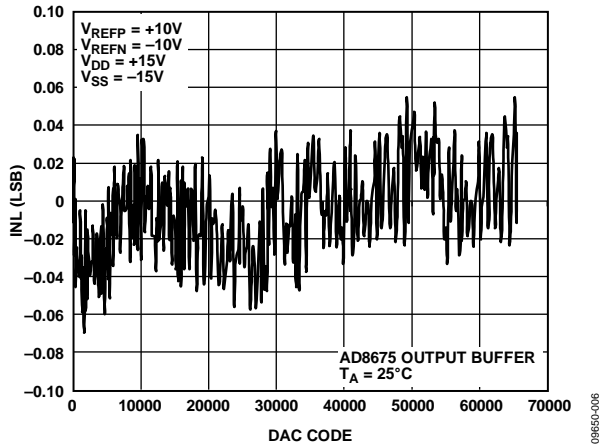


Figure 5. Integral Nonlinearity Error vs. DAC Code, ±10 V Span

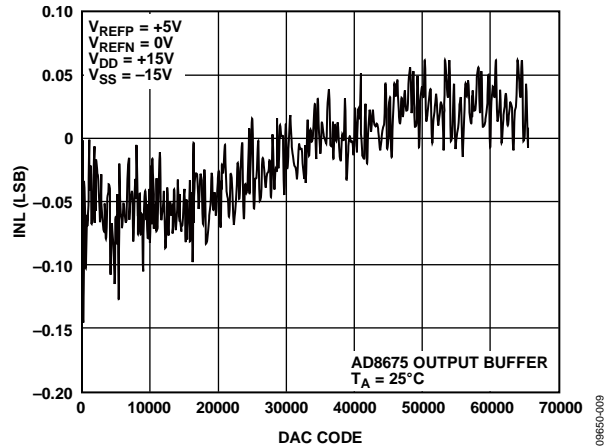


Figure 8. Integral Nonlinearity Error vs. DAC Code, 5 V Span, ×2 Gain Mode

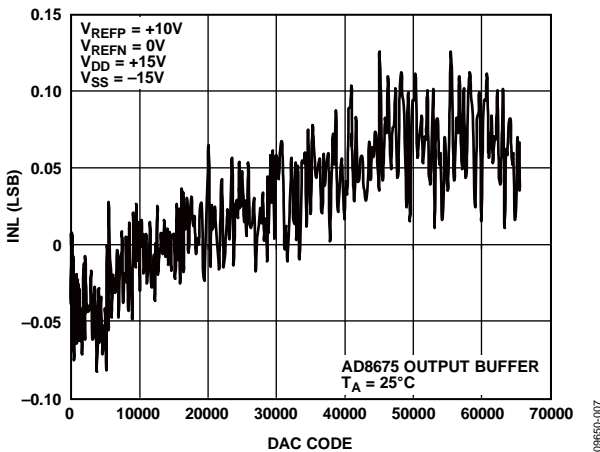


Figure 6. Integral Nonlinearity Error vs. DAC Code, 10 V Span

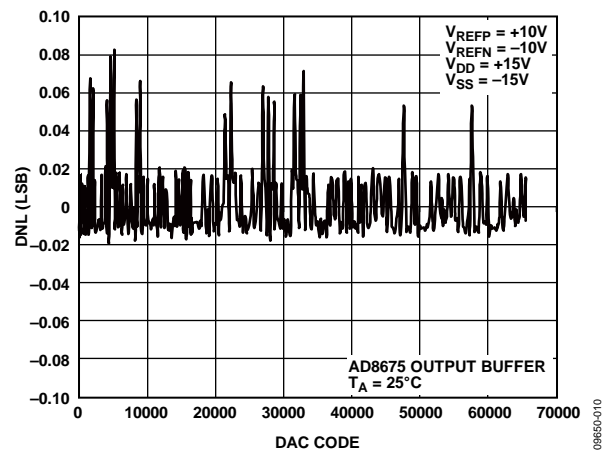


Figure 9. Differential Nonlinearity Error vs. DAC Code, ±10 V Span

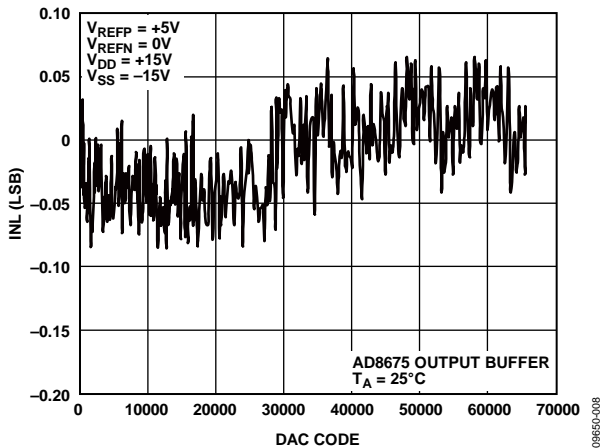


Figure 7. Integral Nonlinearity Error vs. DAC Code, 5 V Span

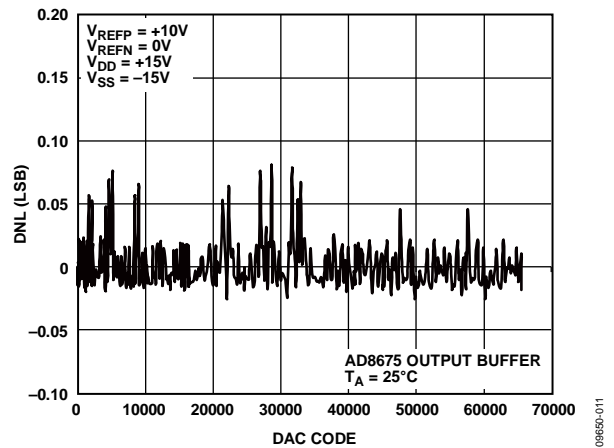


Figure 10. Differential Nonlinearity Error vs. DAC Code, 10 V Span

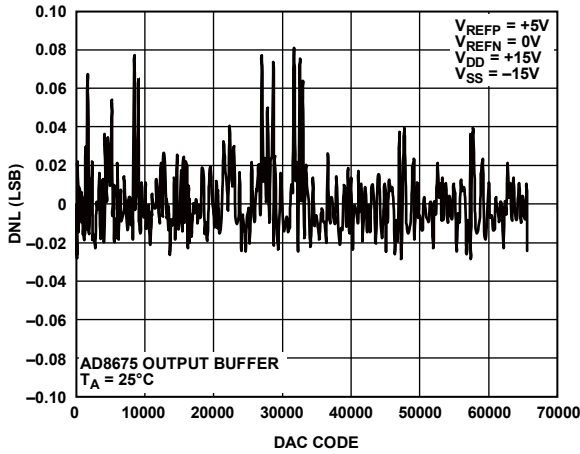


Figure 11. Differential Nonlinearity Error vs. DAC Code, 5 V Span

09850-012

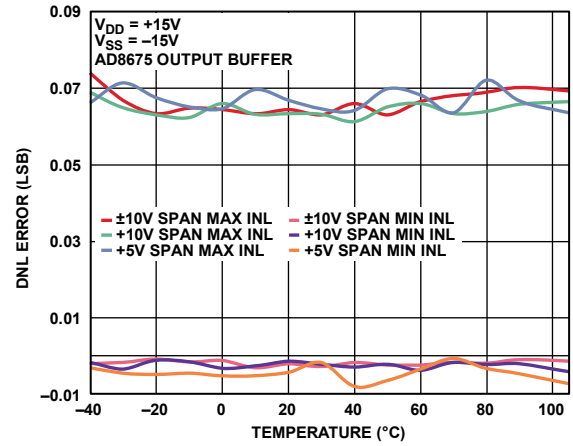


Figure 14. Differential Nonlinearity Error vs. Temperature

09850-014

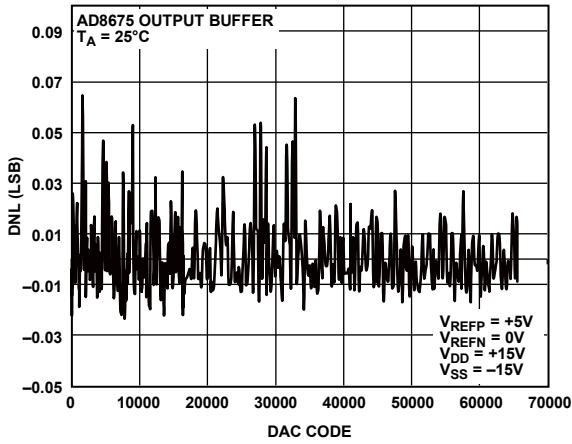


Figure 12. Differential Nonlinearity Error vs. DAC Code, 5 V Span, x2 Gain Mode

09850-013

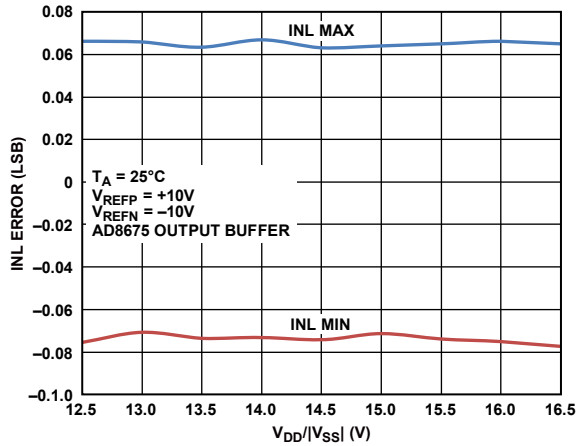


Figure 15. Integral Nonlinearity Error vs. Supply Voltage, ±10 V Span

09850-016

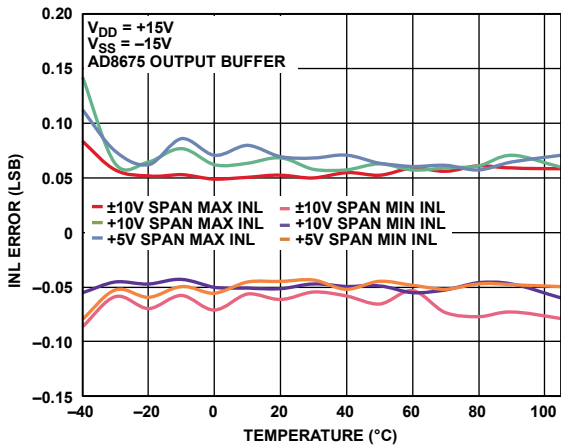


Figure 13. Integral Nonlinearity Error vs. Temperature

09850-015

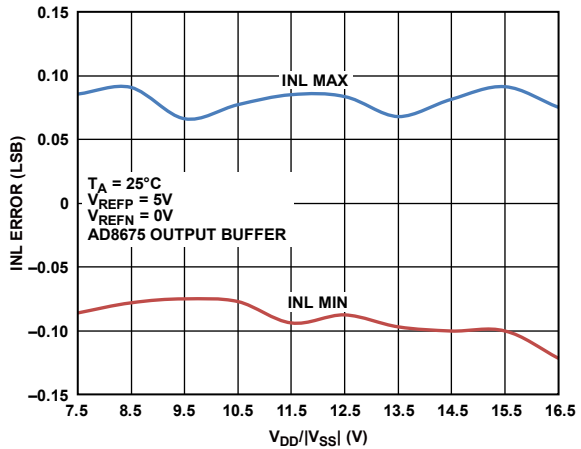


Figure 16. Integral Nonlinearity Error vs. Supply Voltage, 5 V Span

09850-017

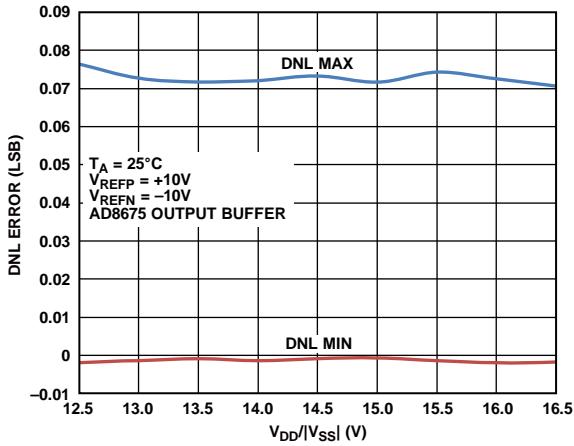


Figure 17. Differential Nonlinearity Error vs. Supply Voltage, ± 10 V Span

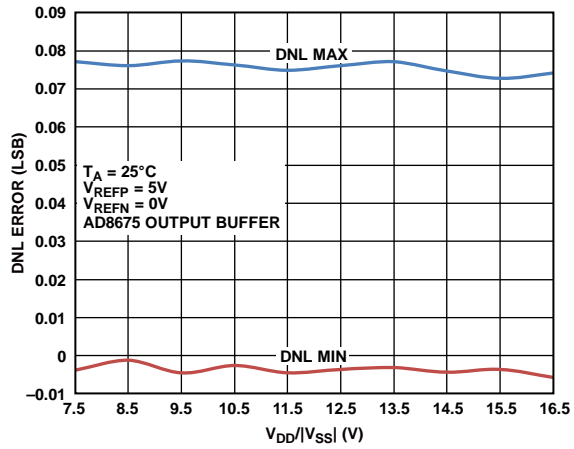


Figure 18. Differential Nonlinearity Error vs. Supply Voltage, 5 V Span

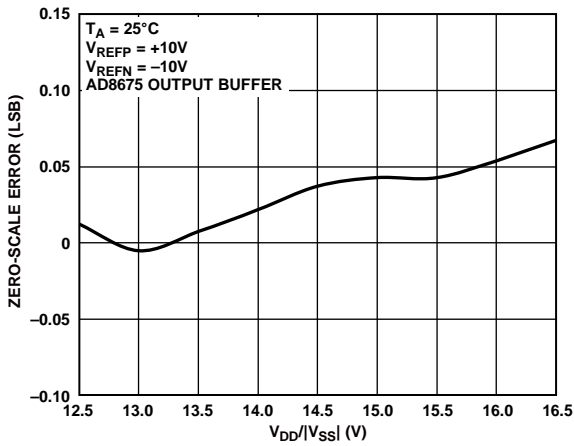


Figure 19. Zero-Scale Error vs. Supply Voltage, ± 10 V Span

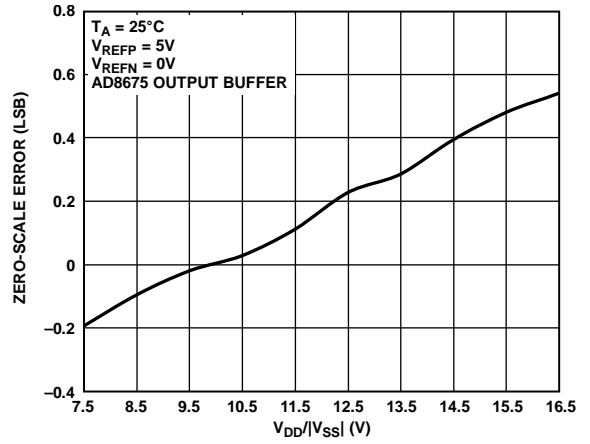


Figure 20. Zero-Scale Error vs. Supply Voltage, 5 V Span

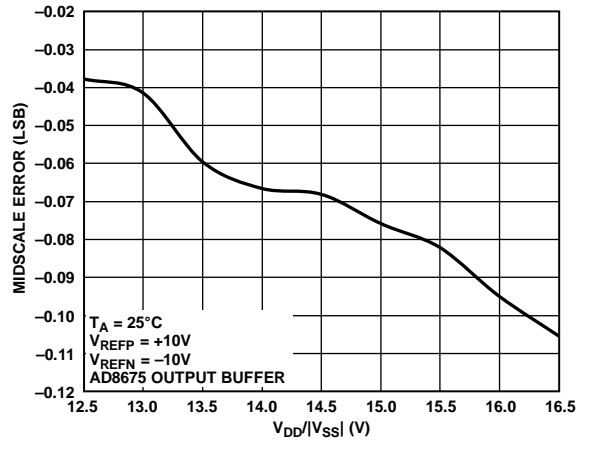


Figure 21. Midscale Error vs. Supply Voltage, ± 10 V Span

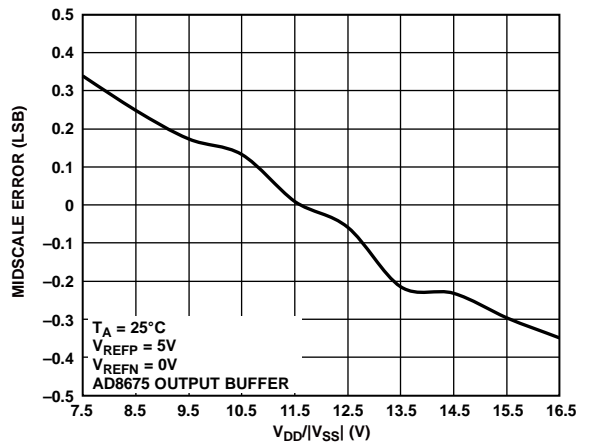


Figure 22. Midscale Error vs. Supply Voltage, 5 V Span

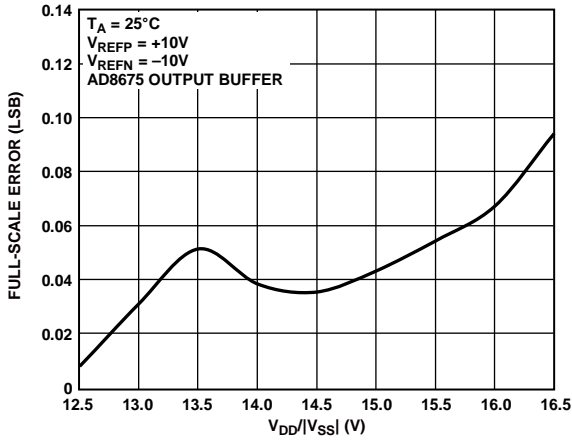


Figure 23. Full-Scale Error vs. Supply Voltage, ±10 V Span

09850-024

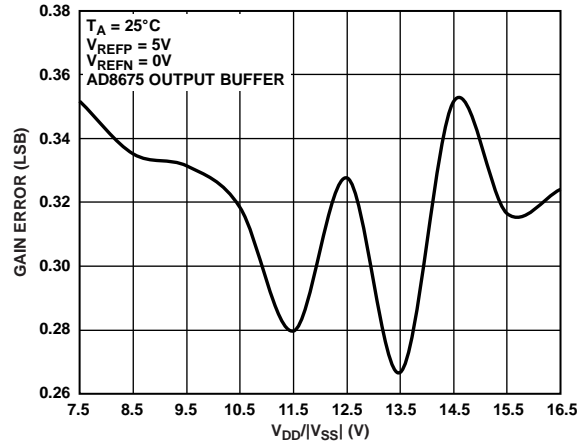


Figure 26. Gain Error vs. Supply Voltage, 5 V Span

09850-027

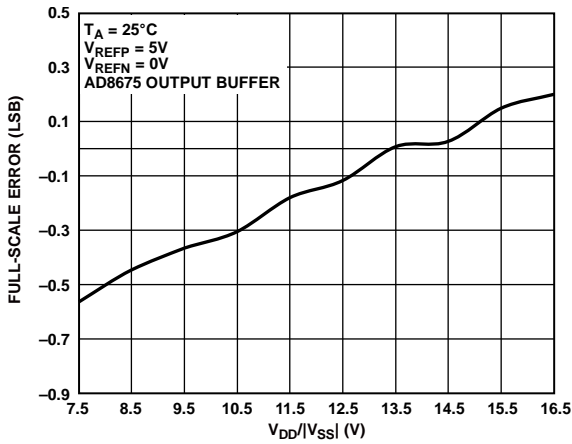


Figure 24. Full-Scale Error vs. Supply Voltage, 5 V Span

09850-025

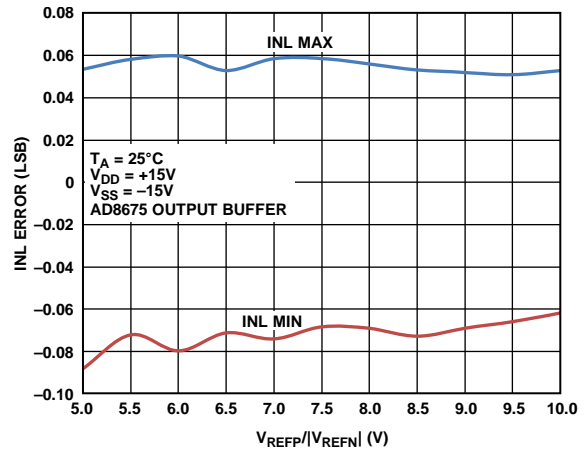


Figure 27. Integral Nonlinearity Error vs. Reference Voltage

09850-028

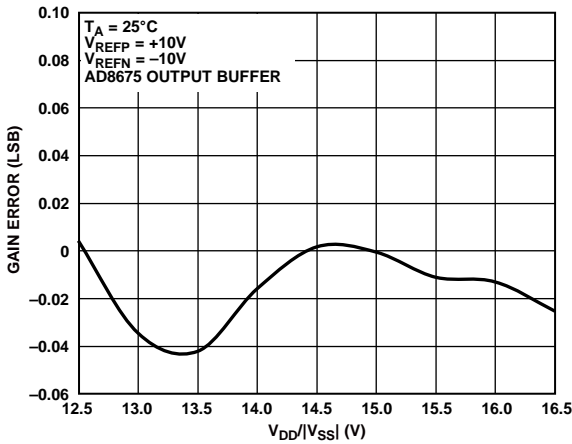


Figure 25. Gain Error vs. Supply Voltage, ±10 V Span

09850-026

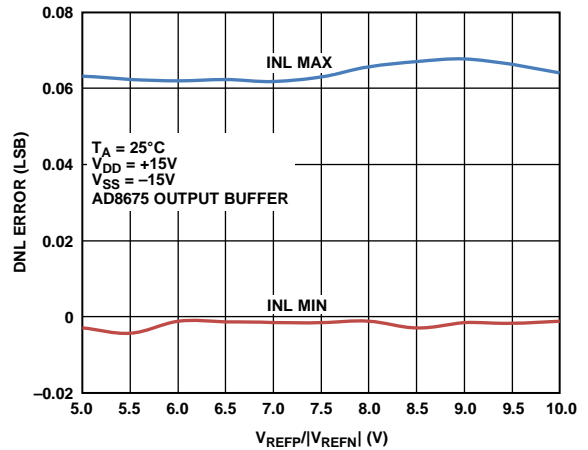


Figure 28. Differential Nonlinearity Error vs. Reference Voltage

09850-029

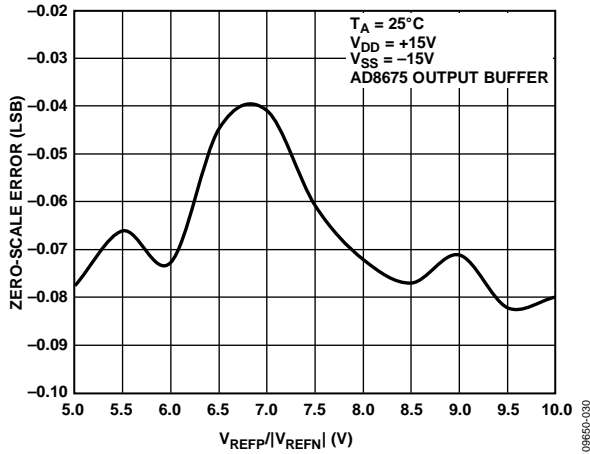


Figure 29. Zero-Scale Error vs. Reference Voltage

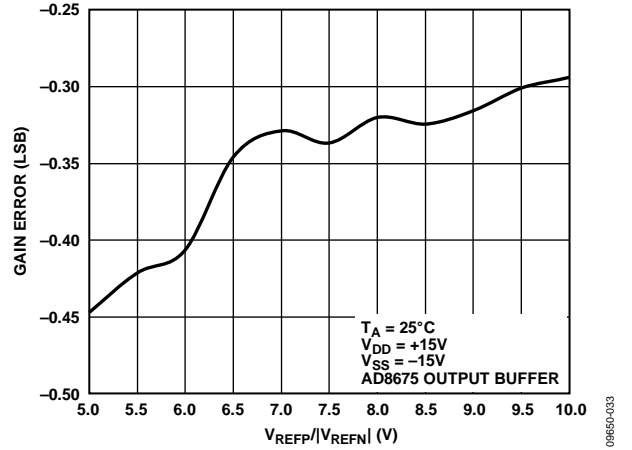


Figure 32. Gain Error vs. Reference Voltage

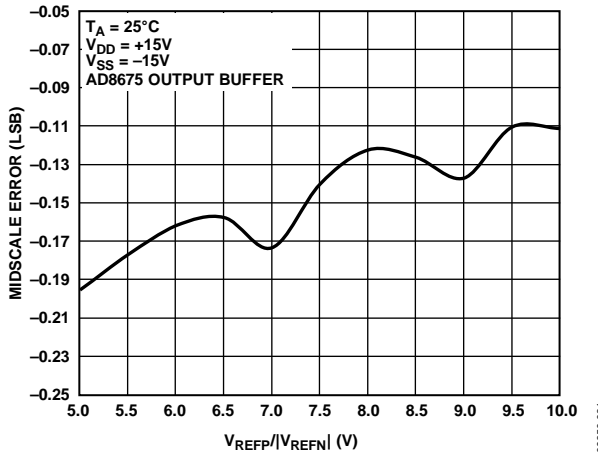


Figure 30. Midscale Error vs. Reference Voltage

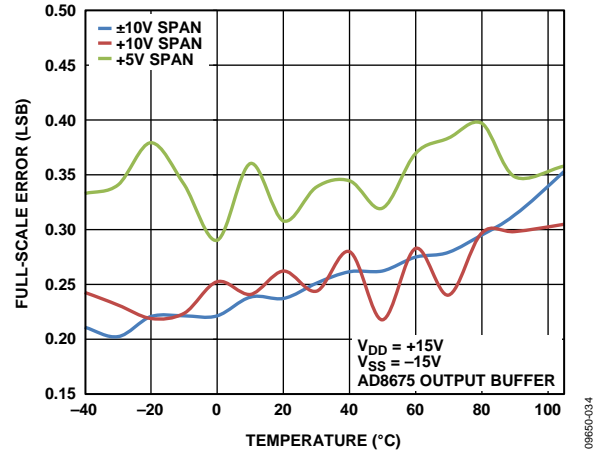


Figure 33. Full-Scale Error vs. Temperature

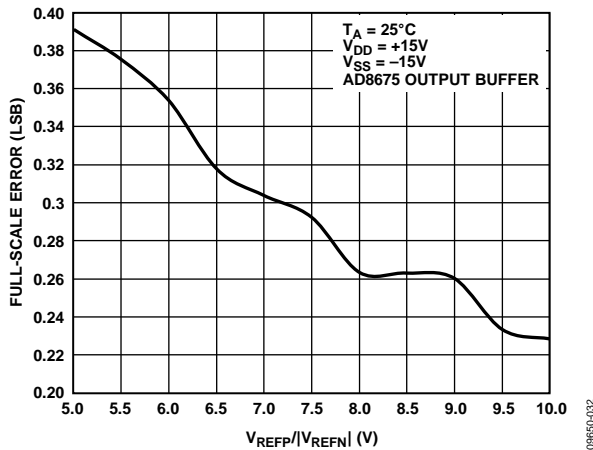


Figure 31. Full-Scale Error vs. Reference Voltage

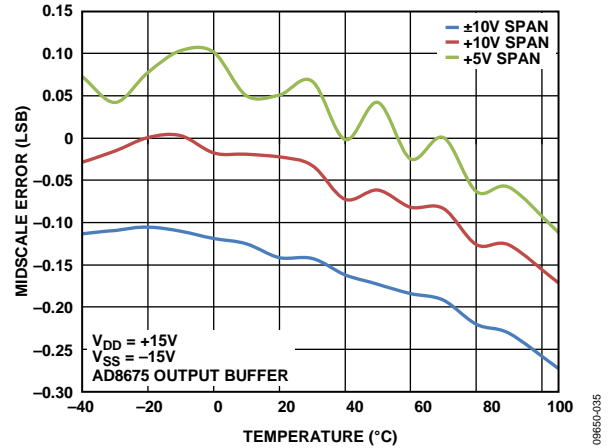


Figure 34. Midscale Error vs. Temperature

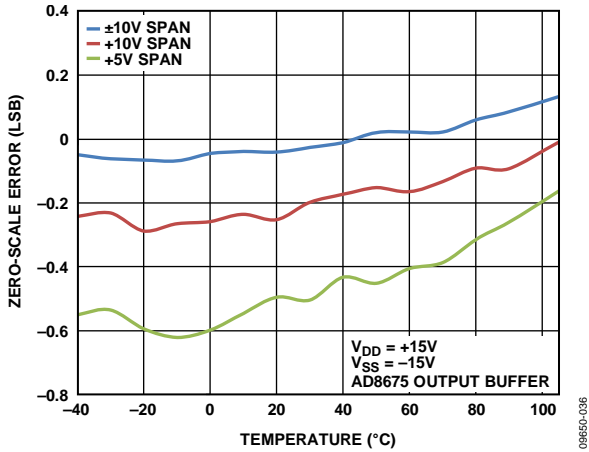


Figure 35. Zero-Scale Error vs. Temperature

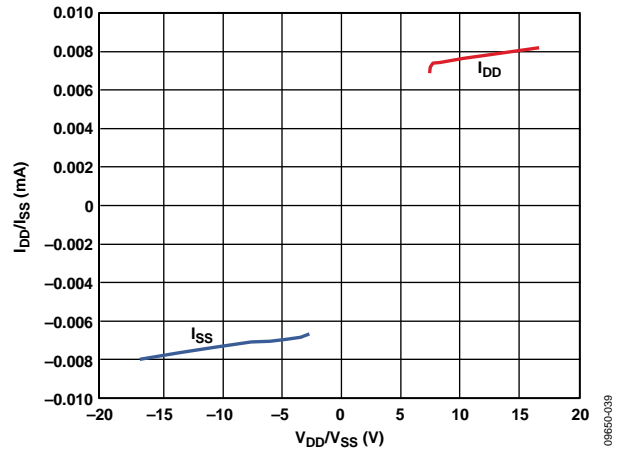


Figure 38. Power Supply Currents vs. Power Supply Voltages

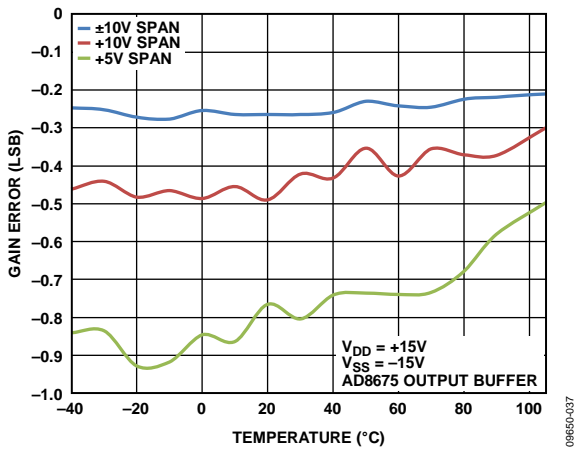


Figure 36. Gain Error vs. Temperature

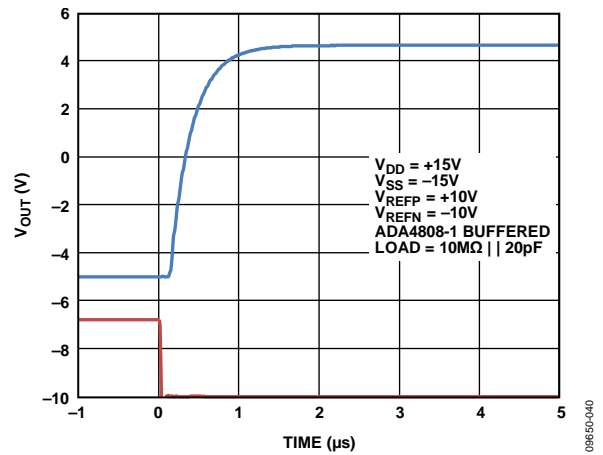


Figure 39. Rising Full-Scale Voltage Step

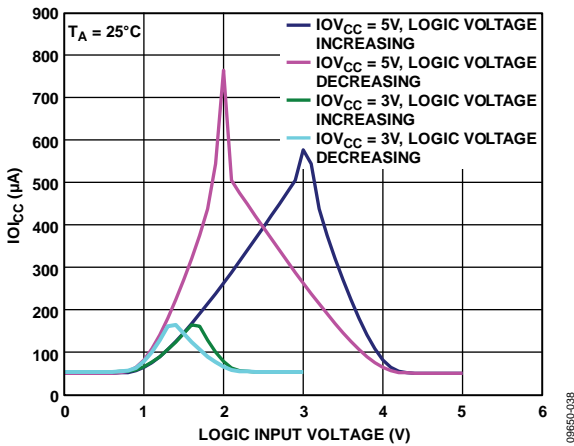


Figure 37. IO_{LCC} vs. Logic Input Voltage

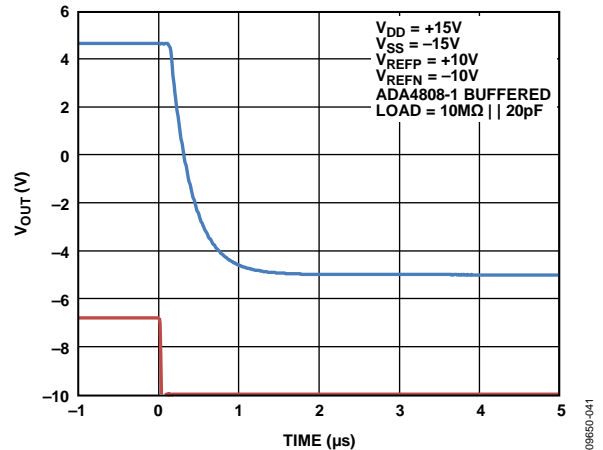


Figure 40. Falling Full-Scale Voltage Step

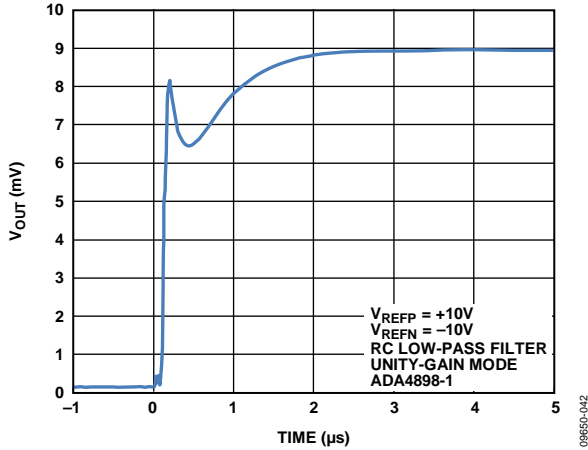


Figure 41. 500 Code Step Settling Time

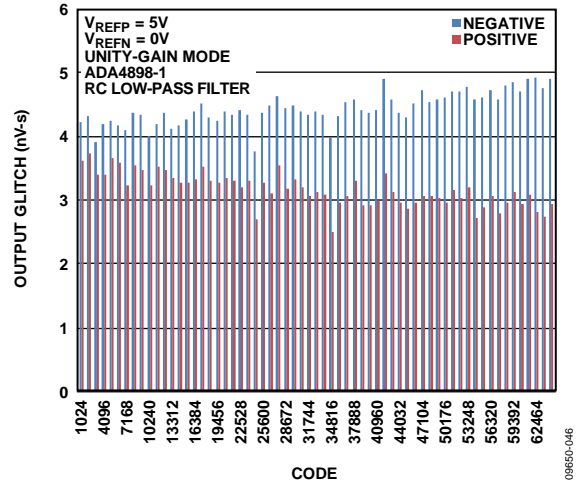


Figure 44. 6 MSB Segment Glitch Energy for 5 V V_{REF}

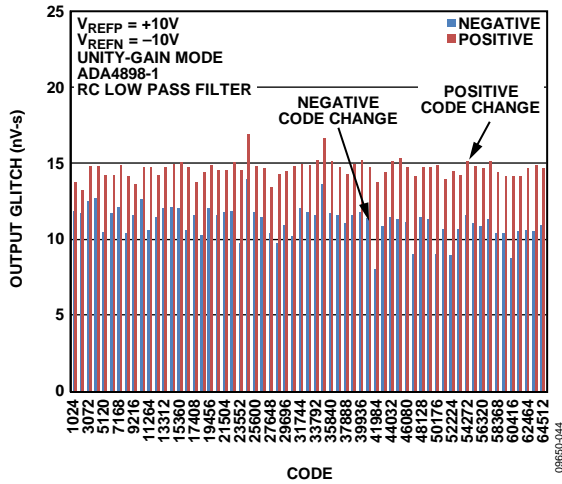


Figure 42. 6 MSB Segment Glitch Energy for ± 10 V V_{REF}

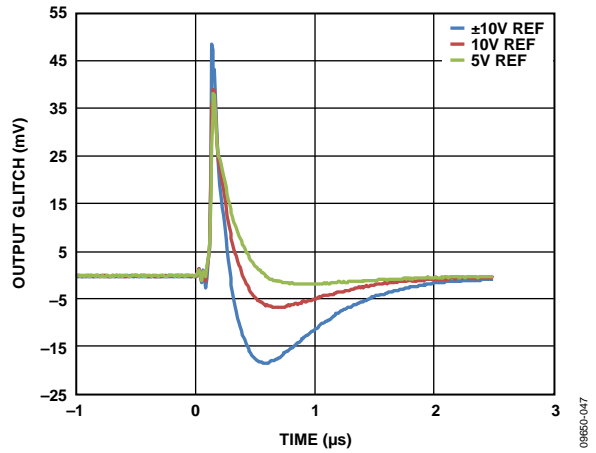


Figure 45. Midscale Peak-to-Peak Glitch for ± 10 V

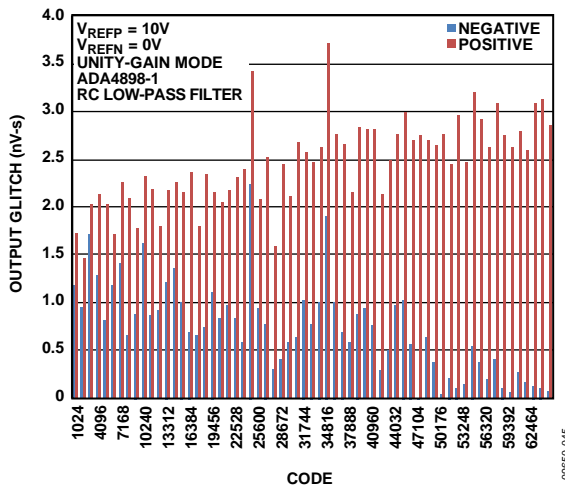


Figure 43. 6 MSB Segment Glitch Energy for 10 V V_{RE}

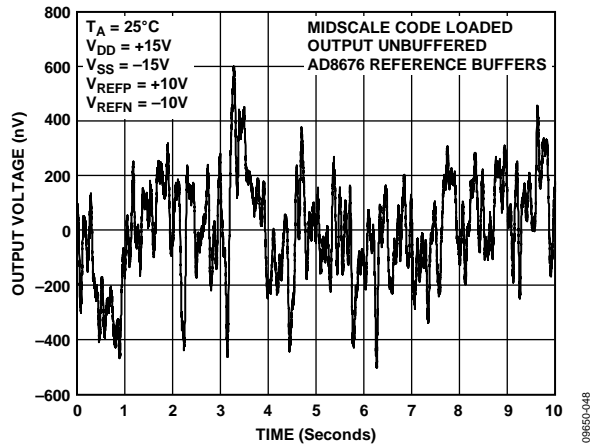


Figure 46. Voltage Output Noise, 0.1 Hz to 10 Hz Bandwidth

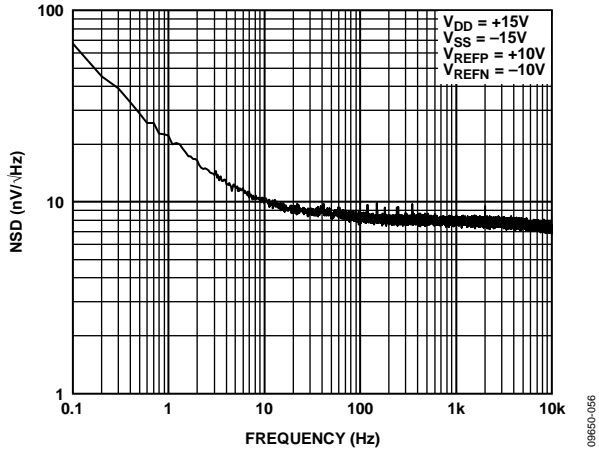


Figure 47. Noise Spectral Density vs. Frequency

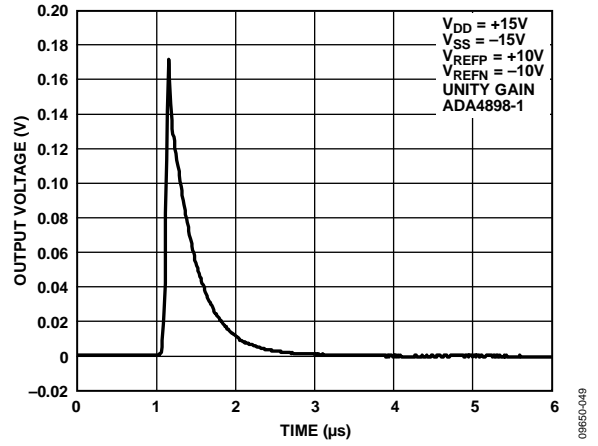


Figure 48. Glitch Impulse on Removal of Output Clamp

TERMINOLOGY

Relative Accuracy

Relative accuracy, or integral nonlinearity (INL), is a measure of the maximum deviation, in LSB, from a straight line passing through the endpoints of the DAC transfer function. A typical INL error vs. code plot is shown in Figure 5.

Differential Nonlinearity (DNL)

Differential nonlinearity is the difference between the measured change and the ideal 1 LSB change between any two adjacent codes. A specified differential nonlinearity of ± 1 LSB maximum ensures monotonicity. This DAC is guaranteed monotonic. A typical DNL error vs. code plot is shown in Figure 9.

Linearity Error Long-Term Stability

Linearity error long-term stability is a measure of the stability of the linearity of the DAC over a long period of time. It is specified in LSB for a time period of 500 hours and 1000 hours at an elevated ambient temperature.

Zero-Scale Error

Zero-scale error is a measure of the output error when zero-scale code (0x00000) is loaded to the DAC register. Ideally, the output voltage should be V_{REFN} . Zero-scale error is expressed in LSBs.

Zero-Scale Error Temperature Coefficient

Zero-scale error temperature coefficient is a measure of the change in zero-scale error with a change in temperature. It is expressed in ppm FSR/ $^{\circ}$ C.

Full-Scale Error

Full-scale error is a measure of the output error when full-scale code (0x0FFFF) is loaded to the DAC register. Ideally, the output voltage should be $V_{REFP} - 1$ LSB. Full-scale error is expressed in LSBs.

Full-Scale Error Temperature Coefficient

Full-scale error temperature coefficient is a measure of the change in full-scale error with a change in temperature. It is expressed in ppm FSR/ $^{\circ}$ C.

Gain Error

Gain error is a measure of the span error of the DAC. It is the deviation in slope of the DAC transfer characteristic from the ideal, expressed in ppm of the full-scale range.

Gain Error Temperature Coefficient

Gain error temperature coefficient is a measure of the change in gain error with a change in temperature. It is expressed in ppm FSR/ $^{\circ}$ C.

Midscale Error

Midscale error is a measure of the output error when midscale code (0x08000) is loaded to the DAC register. Ideally, the output voltage should be $(V_{REFP} - V_{REFN})/2 + V_{REFN}$. Midscale error is expressed in LSBs.

Output Voltage Settling Time

Output voltage settling time is the amount of time it takes for the output voltage to settle to a specified level for a specified change in voltage. For fast settling applications, a high speed buffer amplifier is required to buffer the load from the 3.4 k Ω output impedance of the AD5760, in which case, it is the amplifier that determines the settling time.

Digital-to-Analog Glitch Impulse

Digital-to-analog glitch impulse is the impulse injected into the analog output when the input code in the DAC register changes state. It is specified as the area of the glitch in nV-sec and is measured when the digital input code is changed by 1 LSB at the major carry transition (see Figure 48).

Output Enabled Glitch Impulse

Output enabled glitch impulse is the impulse injected into the analog output when the clamp to ground on the DAC output is removed. It is specified as the area of the glitch in nV-sec (see Figure 48).

Digital Feedthrough

Digital feedthrough is a measure of the impulse injected into the analog output of the DAC from the digital inputs of the DAC but is measured when the DAC output is not updated. It is specified in nV-sec and measured with a full-scale code change on the data bus, that is, from all 0s to all 1s, and vice versa.

Total Harmonic Distortion (THD)

Total harmonic distortion is the ratio of the rms sum of the harmonics of the DAC output to the fundamental value. Only the second to fifth harmonics are included.

DC Power Supply Rejection Ratio.

DC power supply rejection ratio is a measure of the rejection of the output voltage to dc changes in the power supplies applied to the DAC. It is measured for a given dc change in power supply voltage and is expressed in μ V/V.

AC Power Supply Rejection Ratio (AC PSRR)

AC power supply rejection ratio is a measure of the rejection of the output voltage to ac changes in the power supplies applied to the DAC. It is measured for a given amplitude and frequency change in power supply voltage and is expressed in decibels.

THEORY OF OPERATION

The **AD5760** is a high accuracy, fast settling, single, 16-bit, serial input, voltage output DAC. It operates from a V_{DD} supply voltage of 7.5 V to 16.5 V and a V_{SS} supply of -16.5 V to -2.5 V. Data is written to the **AD5760** in a 24-bit word format via a 3-wire serial interface. The **AD5760** incorporates a power-on reset circuit that ensures the DAC output powers up to 0 V with the V_{OUT} pin clamped to AGND through a ~ 6 k Ω internal resistor.

DAC ARCHITECTURE

The architecture of the **AD5760** consists of two matched DAC sections. A simplified circuit diagram is shown in Figure 49. The six MSBs of the 16-bit data-word are decoded to drive 63 switches, E0 to E62. Each of these switches connects one of 63 matched resistors to either the buffered V_{REFP} or buffered V_{REFN} voltage. The remaining 10 bits of the data-word drive the S0 to S9 switches of a 10-bit voltage mode R-2R ladder network.

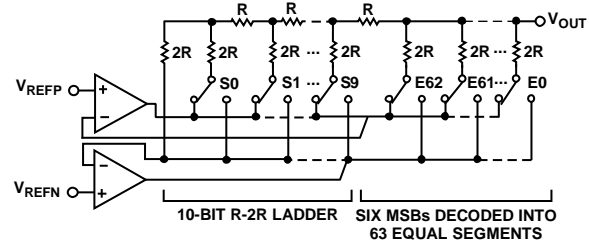


Figure 49. DAC Ladder Structure Serial Interface

SERIAL INTERFACE

The **AD5760** has a 3-wire serial interface ($\overline{\text{SYNC}}$, SCLK, and SDIN) that is compatible with SPI, QSPI, and MICROWIRE interface standards, as well as most DSPs (see Figure 2 for a timing diagram).

Input Shift Register

The input shift register is 24 bits wide. Data is loaded into the device MSB first as a 24-bit word under the control of a serial clock input, SCLK, which can operate at up to 35 MHz. The input register consists of a R/W bit, three address bits, and 20 data bits as shown in Table 6. The timing diagram for this operation is shown in Figure 2.

Table 6. Input Shift Register Format

| MSB | | | | LSB |
|------|------------------|------|------|---------------|
| DB23 | DB22 | DB21 | DB20 | DB19 to DB0 |
| R/W | Register address | | | Register data |

Table 7. Decoding the Input Shift Register

| R/W | Register Address | | | Description |
|----------------|------------------|---|---|--|
| X ¹ | 0 | 0 | 0 | No operation (NOP). Used in readback operations. |
| 0 | 0 | 0 | 1 | Write to the DAC register. |
| 0 | 0 | 1 | 0 | Write to the control register. |
| 0 | 0 | 1 | 1 | Write to the clearcode register. |
| 0 | 1 | 0 | 0 | Write to the software control register. |
| 1 | 0 | 0 | 1 | Read from the DAC register. |
| 1 | 0 | 1 | 0 | Read from the control register. |
| 1 | 0 | 1 | 1 | Read from the clearcode register. |

¹ X is don't care.

Standalone Operation

The serial interface works with both a continuous and noncontinuous serial clock. A continuous SCLK source can be used only if SYNC is held low for the correct number of clock cycles.

In gated clock mode, a burst clock containing the exact number of clock cycles must be used, and SYNC must be taken high after the final clock to latch the data. The first falling edge of SYNC starts the write cycle. Exactly 24 falling clock edges must be applied to SCLK before SYNC is brought high again. If SYNC is brought high before the 24th falling SCLK edge, the data written is invalid. If more than 24 falling SCLK edges are applied before SYNC is brought high, the input data is also invalid.

The input shift register is updated on the rising edge of SYNC. For another serial transfer to take place, SYNC must be brought low again. After the end of the serial data transfer, data is automatically transferred from the input shift register to the addressed register. When the write cycle is complete, the output can be updated by taking LDAC low while SYNC is high.

Readback

The contents of all the on-chip registers can be read back via the SDO pin. Table 7 outlines how the registers are decoded. After a register has been addressed for a read, the next 24 clock cycles clock the data out on the SDO pin. The clocks must be applied while SYNC is low. When SYNC is returned high, the SDO pin is placed in tristate. For a read of a single register, the NOP function can be used to clock out the data. Alternatively, if more than one register is to be read, the data of the first register to be addressed can be clocked out at the same time that the second register to be read is being addressed. The SDO pin must be enabled to complete a readback operation. The SDO pin is enabled by default.

HARDWARE CONTROL PINS

Load DAC Function (LDAC)

After data has been transferred into the input register of the DAC, there are two ways to update the DAC register and DAC output. Depending on the status of both SYNC and LDAC, one of two update modes is selected: synchronous DAC update or asynchronous DAC update.

Synchronous DAC Update

In this mode, LDAC is held low while data is being clocked into the input shift register. The DAC output is updated on the rising edge of SYNC.

Asynchronous DAC Update

In this mode, LDAC is held high while data is being clocked into the input shift register. The DAC output is asynchronously updated by taking LDAC low after SYNC has been taken high. The update now occurs on the falling edge of LDAC.

Reset Function (RESET)

The AD5760 can be reset to its power-on state by two means: either by asserting the RESET pin or by using the reset function in the software control register (see Table 13). If the RESET pin is not used, hardwire it to IOV_{CC}.

Asynchronous Clear Function (CLR)

The CLR pin is an active low clear that allows the output to be cleared to a user defined value. The 16-bit clearcode value is programmed to the clearcode register (see Table 12). It is necessary to maintain CLR low for a minimum amount of time to complete the operation (see Figure 2). When the CLR signal is returned high, the output remains at the clear value (if LDAC is high) until a new value is loaded to the DAC register. The output cannot be updated with a new value while the CLR pin is low. A clear operation can also be performed by setting the CLR bit in the software control register (see Table 13).

ON-CHIP REGISTERS

DAC Register

Table 9 outlines how data is written to and read from the DAC register.

The following equation describes the ideal transfer function of the DAC:

$$V_{OUT} = \frac{(V_{REFP} - V_{REFN}) \times D}{2^{16}} + V_{REFN}$$

where:

V_{REFN} is the negative voltage applied at the V_{REFN} input pin.

V_{REFP} is the positive voltage applied at the V_{REFP} input pin.

D is the 16-bit code programmed to the DAC.

Table 8. Hardware Control Pins Truth Table

| LDAC | CLR | RESET | Function |
|----------------|----------------|-------|--|
| X ¹ | X ¹ | 0 | The AD5760 is in reset mode. The device cannot be programmed. |
| X ¹ | X ¹ | ↑ | The AD5760 is returned to its power-on state. All registers are set to their default values. |
| 0 | 0 | 1 | The DAC register is loaded with the clearcode register value, and the output is set accordingly. |
| 0 | 1 | 1 | The output is set according to the DAC register value. |
| 1 | 0 | 1 | The DAC register is loaded with the clearcode register value, and the output is set accordingly. |
| ↓ | 1 | 1 | The output is set according to the DAC register value. |
| ↓ | 0 | 1 | The output remains at the clearcode register value. |
| ↑ | 1 | 1 | The output remains set according to the DAC register value. |
| ↑ | 0 | 1 | The output remains at the clearcode register value. |
| 1 | ↓ | 1 | The DAC register is loaded with the clearcode register value and the output is set accordingly. |
| 0 | ↓ | 1 | The DAC register is loaded with the clearcode register value and the output is set accordingly. |
| 1 | ↑ | 1 | The output remains at the clearcode register value. |
| 0 | ↑ | 1 | The output is set according to the DAC register value. |

¹ X is don't care.

Table 9. DAC Register

| MSB | | | | | | | LSB | |
|------|------------------|------|------|-------------------|----------------|----------------|----------------|----------------|
| DB23 | DB22 | DB21 | DB20 | DB19 to DB4 | DB3 | DB2 | DB1 | DB0 |
| R/W | Register address | | | DAC register data | | | | |
| R/W | 0 | 0 | 1 | 16 bits of data | X ¹ | X ¹ | X ¹ | X ¹ |

¹ X is don't care.

Control Register

The control register controls the mode of operation of the [AD5760](#).

Clearcode Register

The clearcode register sets the value to which the DAC output is set when the CLR pin or CLR bit in the software control register is asserted. The output value depends on the DAC coding that is being used, either binary or twos complement. The default register value is 0.

Table 10. Control Register

| MSB | | | | | | | | | | | LSB | | | | |
|------|------------------|------|------|-----------------------|----------|------|-----|-----|--------|---------|--------|-------|------|----------|-----|
| DB23 | DB22 | DB21 | DB20 | DB19 to DB11 | DB10 | DB9 | DB8 | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 |
| R/W | Register address | | | Control register data | | | | | | | | | | | |
| R/W | 0 | 1 | 0 | Reserved | Reserved | 0000 | | | SDODIS | BIN/2sC | DACTRI | OPGND | RBUF | Reserved | |

Table 11. Control Register Functions

| Bit Name | Description |
|----------|--|
| Reserved | These bits are reserved and should be programmed to zero. |
| RBUF | Output amplifier configuration control. 0: the internal amplifier, A1, is powered up and Resistors R_{FB} and R1 are connected in series, as shown in Figure 53. This allows an external amplifier to be connected in a gain of two configuration. See the AD5760 Features section for further details. 1: (default) the internal amplifier, A1, is powered down and Resistors R_{FB} and R1 are connected in parallel, as shown in Figure 52, so that the resistance between the RFB and INV pins is 3.4 k Ω , equal to the resistance of the DAC. This allows the R_{FB} and INV pins to be used for input bias current compensation for an external unity-gain amplifier. See the AD5760 Features section for further details. |
| OPGND | Output ground clamp control. 0: the DAC output clamp to ground is removed, and the DAC is placed in normal mode. 1: (default) the DAC output is clamped to ground through a ~6 k Ω resistance, and the DAC is placed in tristate mode. Resetting the device puts the DAC in OPGND mode, where the output ground clamp is enabled and the DAC is tristated. Setting the OPGND bit to 1 in the control register overrules any write to the DACTRI bit. |
| DACTRI | DAC tristate control. 0: the DAC is in normal operating mode. 1: (default) the DAC is in tristate mode. |
| BIN/2sC | DAC register coding selection. 0: (default) the DAC register uses twos complement coding. 1: the DAC register uses offset binary coding. |
| SDODIS | SDO pin enable/disable control. 0: (default) the SDO pin is enabled. 1: the SDO pin is disabled (tristate). |
| R/W | Read/write select bit. 0: AD5760 is addressed for a write operation. 1: AD5760 is addressed for a read operation. |

Table 12. Clearcode Register

| MSB | | | | | | | | | | | LSB | | | |
|------|------------------|------|------|-------------------------|--|--|--|----------------|----------------|----------------|----------------|--|--|--|
| DB23 | DB22 | DB21 | DB20 | DB19 to DB4 | | | | DB3 | DB2 | DB1 | DB0 | | | |
| R/W | Register address | | | Clearcode register data | | | | | | | | | | |
| R/W | 0 | 1 | 1 | 16 bits of data | | | | X ¹ | X ¹ | X ¹ | X ¹ | | | |

¹ X is don't care.

Software Control Register

This is a write only register in which writing a 1 to a particular bit has the same effect as pulsing the corresponding pin low.

Table 13. Software Control Register

| MSB | | | | LSB | | | |
|------|------------------|------|------|--------------------------------|-------|------------------|-------------------|
| DB23 | DB22 | DB21 | DB20 | DB19 to DB3 | DB2 | DB1 | DB0 |
| R/W | Register address | | | Software control register data | | | |
| 0 | 1 | 0 | 0 | Reserved | Reset | CLR ¹ | LDAC ² |

¹ The CLR function has no effect when the $\overline{\text{LDAC}}$ pin is low.

² The LDAC function has no effect when the CLR pin is low.

Table 14. Software Control Register Functions

| Bit Name | Description |
|----------|--|
| LDAC | Setting this bit to 1 updates the DAC register and, consequently, the DAC output. |
| CLR | Setting this bit to 1 sets the DAC register to a user defined value (see Table 12) and updates the DAC output. The output value depends on the DAC register coding that is being used, either binary or twos complement. |
| Reset | Setting this bit to 1 returns the AD5760 to its power-on state. |

AD5760 FEATURES

POWER-ON TO 0 V

The AD5760 contains a power-on reset circuit that, as well as resetting all registers to their default values, controls the output voltage during power-up. Upon power-on, the DAC is placed in tristate (its reference inputs are disconnected), and its output is clamped to AGND through a ~6 kΩ resistor. The DAC remains in this state until programmed otherwise via the control register. This is a useful feature in applications where it is important to know the state of the DAC output while it is in the process of powering up.

POWER-UP SEQUENCE

To power up the device in a known safe state, power up the V_{DD} supply before powering up the V_{CC} supply. This step ensures that V_{CC} does not come up while V_{DD} is unpowered during power-on. If the device cannot be powered-up in a safe state, connect an external Schottky diode across the V_{DD} and V_{CC} supplies as shown in Figure 50.




Figure 50. Schottky Diode Connection

CONFIGURING THE AD5760

After power-on, the AD5760 must be configured to put it into normal operating mode before programming the output. To do this, the control register must be programmed. The DAC is removed from tristate by clearing the DACTRI bit, and the output clamp is removed by clearing the OPGND bit. At this point, the output goes to V_{REFN} unless an alternative value is first programmed to the DAC register.

DAC OUTPUT STATE

The DAC output can be placed in one of three states, controlled by the DACTRI and OPGND bits of the control register, as shown in Table 15.

Table 15. Output State Truth Table

| DACTRI | OPGND | Output State |
|--------|-------|--------------------------------------|
| 0 | 0 | Normal operating mode. |
| 0 | 1 | Output is clamped via ~6 kΩ to AGND. |
| 1 | 0 | Output is in tristate. |
| 1 | 1 | Output is clamped via ~6 kΩ to AGND. |

OUTPUT AMPLIFIER CONFIGURATION

There are a number of different ways that an output amplifier can be connected to the AD5760, depending on the voltage references applied and the desired output voltage span.

Unity-Gain Configuration

Figure 51 shows an output amplifier configured for unity gain. In this configuration, the output spans from V_{REFN} to V_{REFP}.

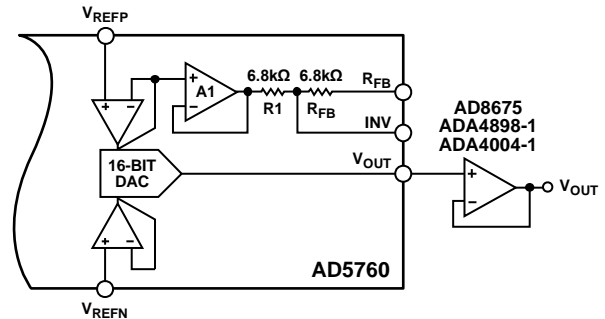


Figure 51. Output Amplifier in Unity-Gain Configuration

A second unity-gain configuration for the output amplifier is one that removes an offset from the input bias currents of the amplifier. It does this by inserting a resistance in the feedback path of the amplifier that is equal to the output resistance of the DAC. The DAC output resistance is 3.4 kΩ. By connecting R1 and R_{FB} in parallel, a resistance equal to the DAC resistance is available on chip. Because the resistors are all on one piece of silicon, they are temperature coefficient matched. To enable this mode of operation, the RBUF bit of the control register must be set to Logic 1. Figure 52 shows how the output amplifier is connected to the AD5760. In this configuration, the output amplifier is in unity gain, and the output spans from V_{REFN} to V_{REFP}. This unity-gain configuration allows a capacitor to be placed in the amplifier feedback path to improve dynamic performance.

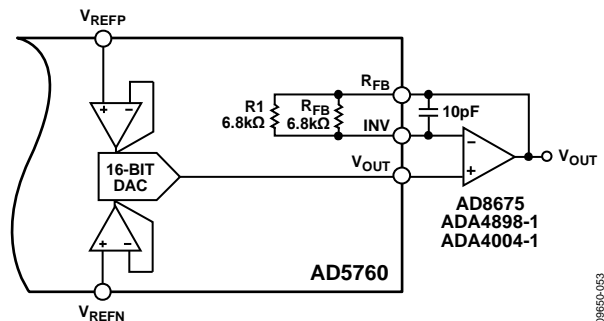


Figure 52. Output Amplifier in Unity-Gain with Amplifier Input Bias Current Compensation

Gain of Two Configuration (×2 Gain Mode)

Figure 53 shows an output amplifier configured for a gain of two. The gain is set by the internal matched 6.8 kΩ resistors, which are exactly twice the DAC resistance, having the effect of removing an offset from the input bias current of the external amplifier. In this configuration, the output spans from $2 \times V_{REFN} - V_{REFP}$ to V_{REFP} . This configuration is used to generate a bipolar output span from a single-ended reference input, with $V_{REFN} = 0$ V. For this mode of operation, the RBUF bit of the control register must be cleared to Logic 0.


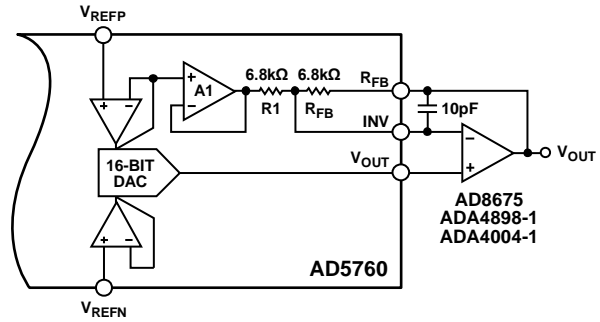


Figure 53. Output Amplifier in Gain of Two Configuration

08650-054

APPLICATIONS INFORMATION
TYPICAL OPERATING CIRCUIT

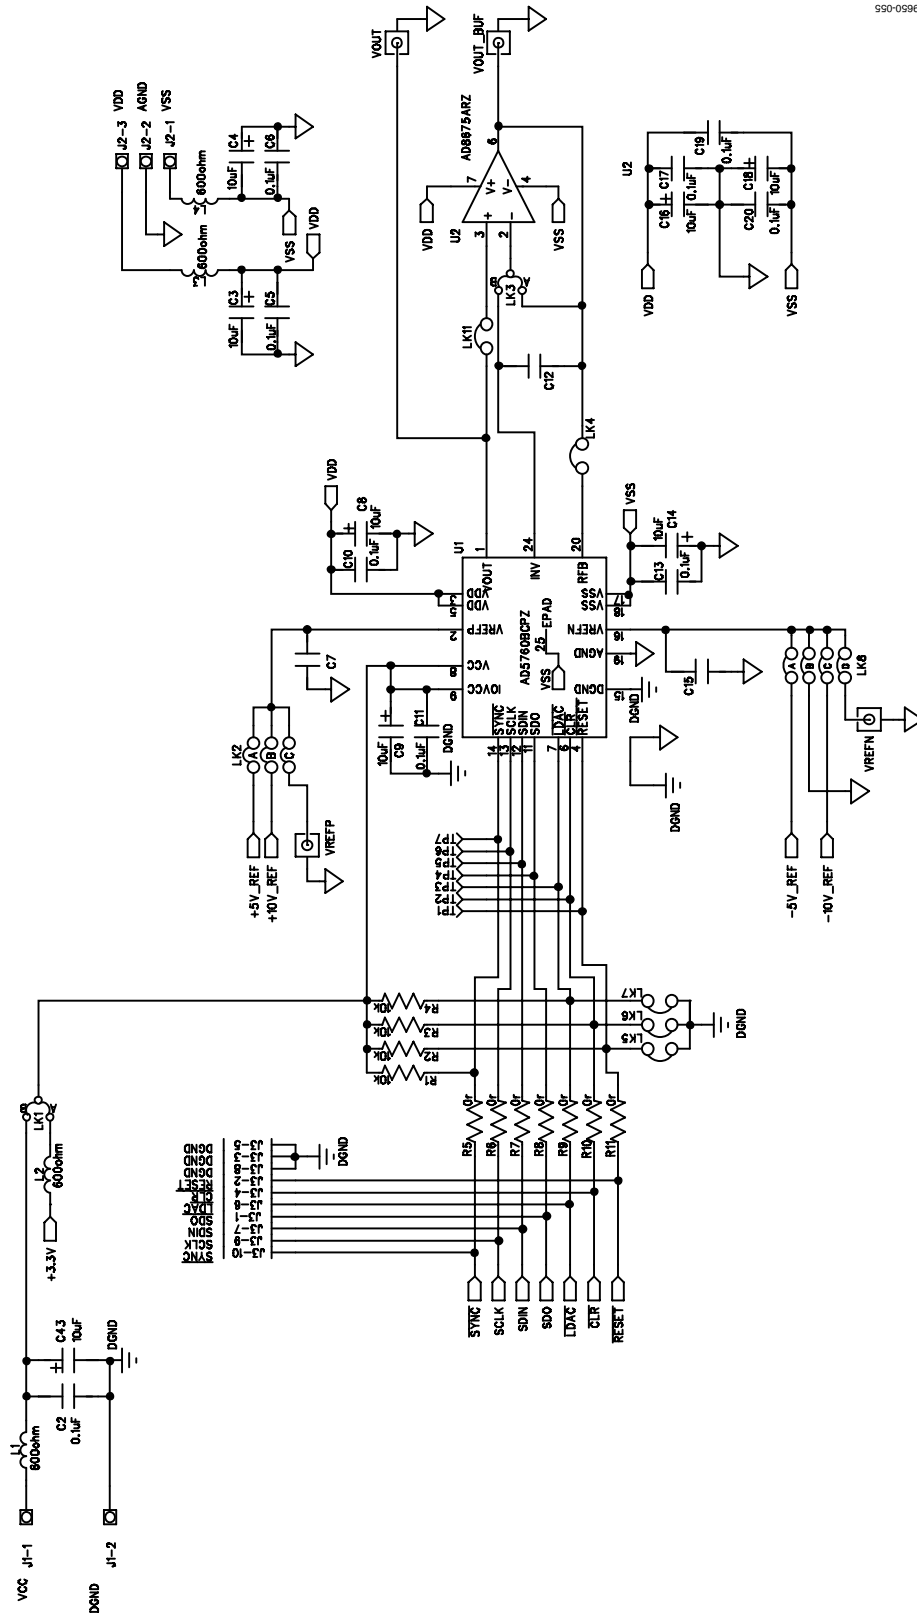

590-05960

Figure 54. Typical Operating Circuit


Figure 54 shows a typical operating circuit for the [AD5760](#) using an [AD8675](#) as an output buffer. Because the output impedance of the [AD5760](#) is 3.4 k Ω , an output buffer is required for driving low resistive, high capacitive loads.

EVALUATION BOARD

Refer to the evaluation board available for the [AD5780](#) or [AD5790](#) to evaluate a 18-bit version or 20-bit version of the [AD5760](#). An evaluation board is available for the [AD5780](#)

to aid designers in evaluating the high performance of the device with minimum effort. The evaluation kit includes a populated and tested [AD5780](#) printed circuit board (PCB). The evaluation board interfaces to the USB port of a PC. Software is available with the evaluation board to allow the user to easily program the [AD5780](#). The software runs on any PC that has Microsoft® Windows® XP (SP2), Vista (32-bit or 64-bit), or Windows 7 installed. The [UG-256](#) is available, which gives full details on the operation of the evaluation board

OUTLINE DIMENSIONS

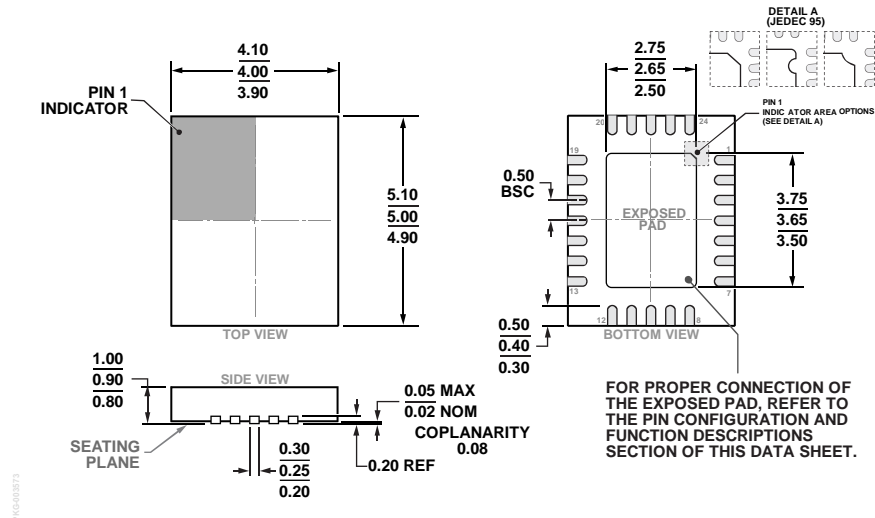

ORDERING GUIDE

| Model ¹ | Temperature Range | INL | Package Description | Package Option |
|--------------------|-------------------|----------|---|----------------|
| AD5760BCPZ | -40°C to +125°C | ±0.5 LSB | 24-Lead Lead Frame Chip Scale Package [LFCSP] | CP-24-5 |
| AD5760BCPZ-REEL7 | -40°C to +125°C | ±0.5 LSB | 24-Lead Lead Frame Chip Scale Package [LFCSP] | CP-24-5 |
| AD5760ACPZ | -40°C to +125°C | ±2 LSB | 24-Lead Lead Frame Chip Scale Package [LFCSP] | CP-24-5 |
| AD5760ACPZ-REEL7 | -40°C to +125°C | ±2 LSB | 24-Lead Lead Frame Chip Scale Package [LFCSP] | CP-24-5 |
| EVAL-AD5760SDZ | | | Evaluation Board | |

¹ Z = RoHS Compliant Part.